

BOBBIO Aiphone ONVIF Camera


BOBBIO to Aiphone ONVIF is an extremely easy integration.

Here is the step by step guide to achieving the integration.


In this guide the new camera is added to an existing BOBBIO app

Open up IX IP web address



Note:Remember to add /webset.cgi?login to the end of your IP address.

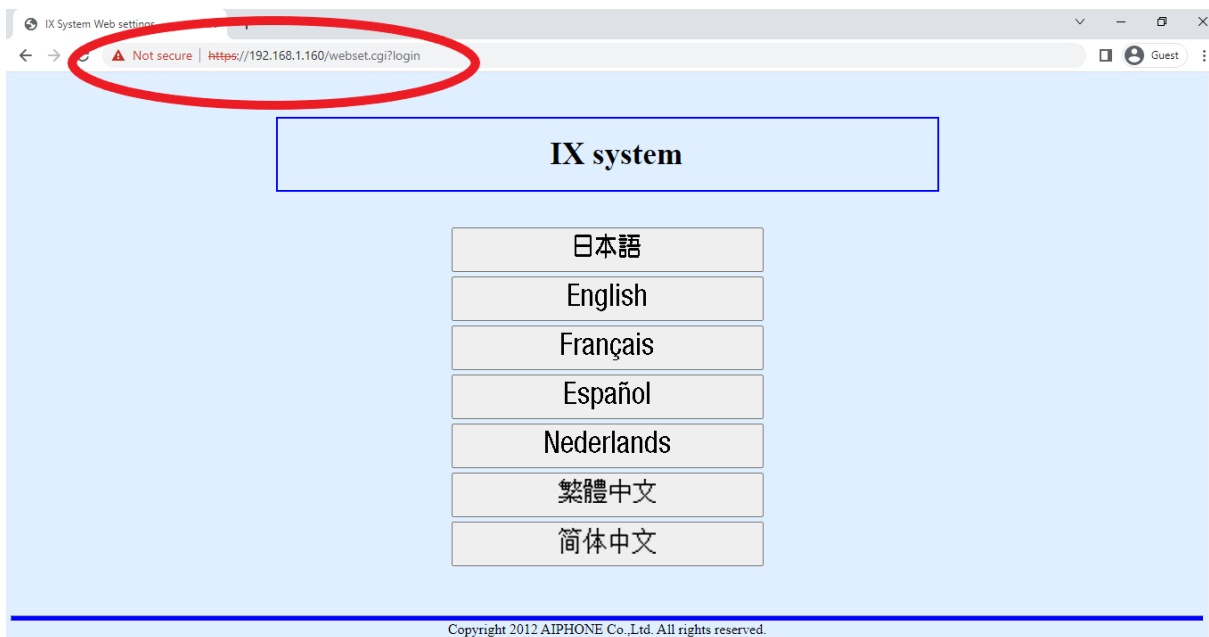

Create an ONVIF and RSTP login and password

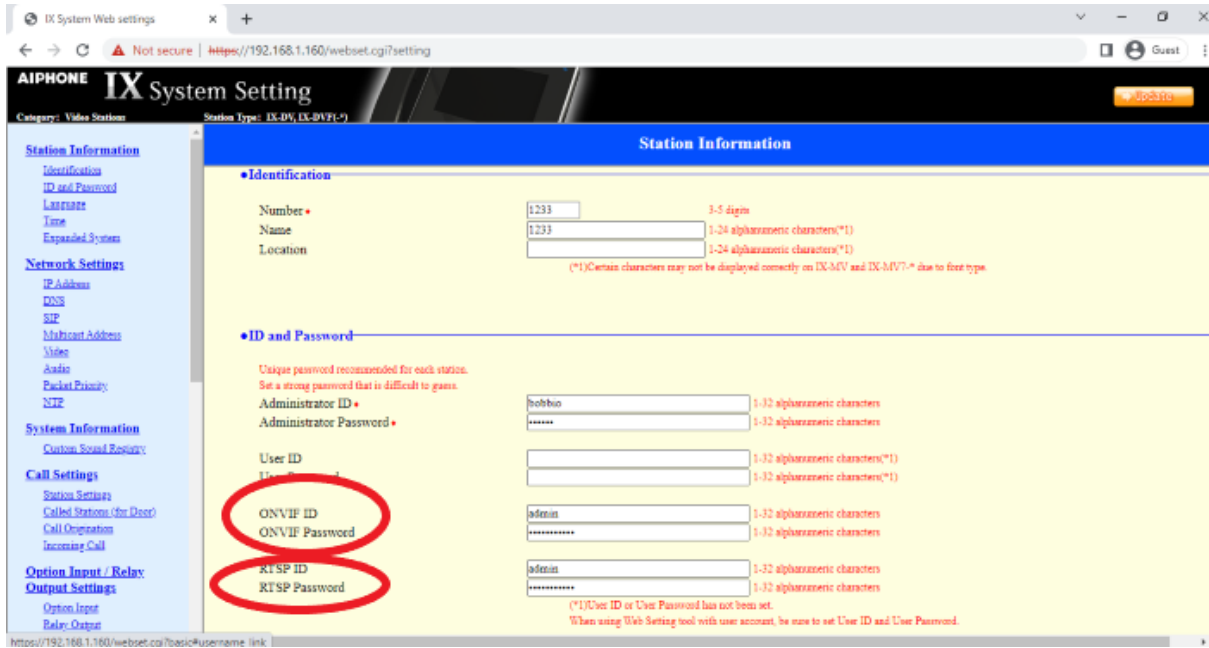

Save changes to IX door station

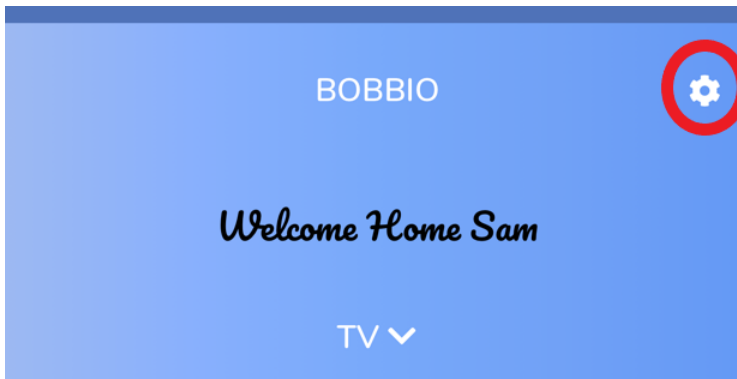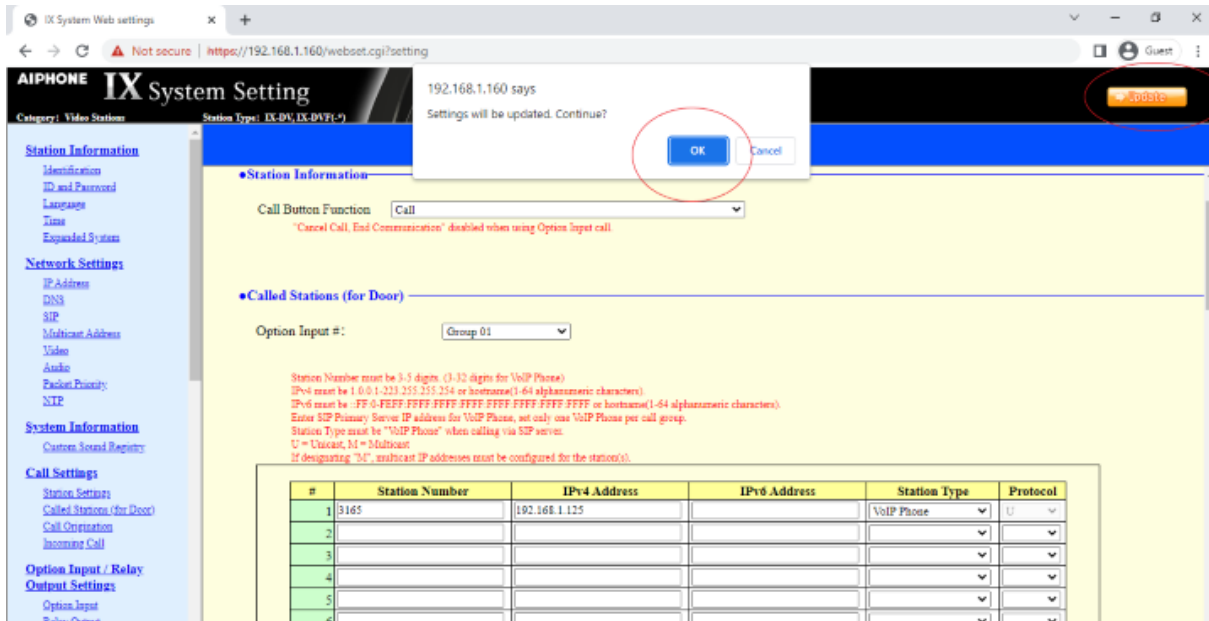

Open the BOBBIO app and enter the edit mode

Click on settings icon top right

Click the settings icon in the top right corner of the screen.

LOUNGE





Click Edit mode

Sam Smith

Change Password

Manage Accounts

Network Settings

Unit Status




Logout





Click enter



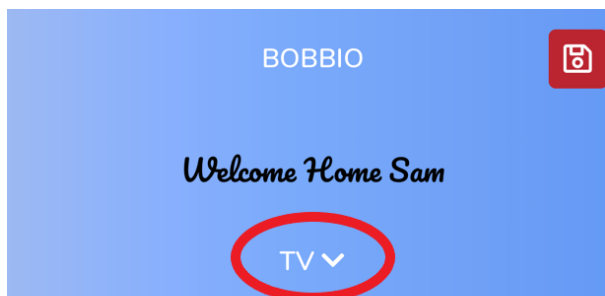

Click on the 'Area' tab and select 'camera' in the drop down menu

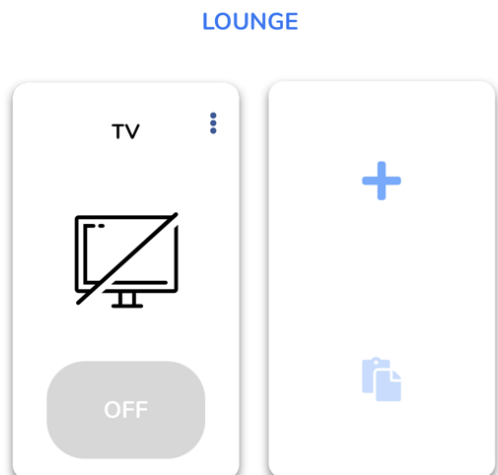


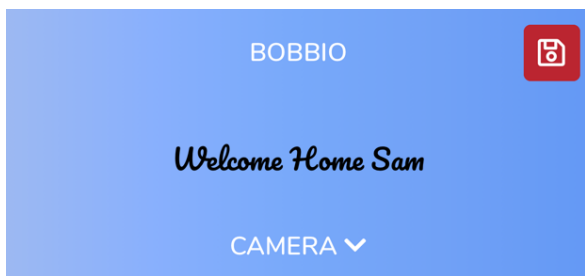



Click on the widget '+' symbol to add a new camera


FRONT DOOR




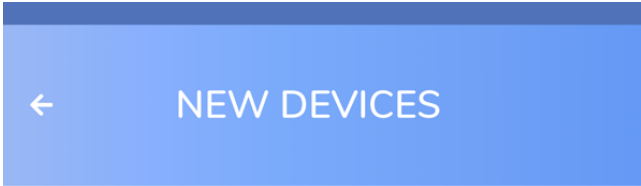



Scroll down to camera in the new devices section

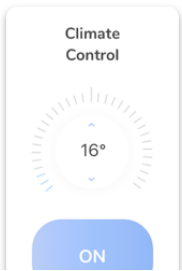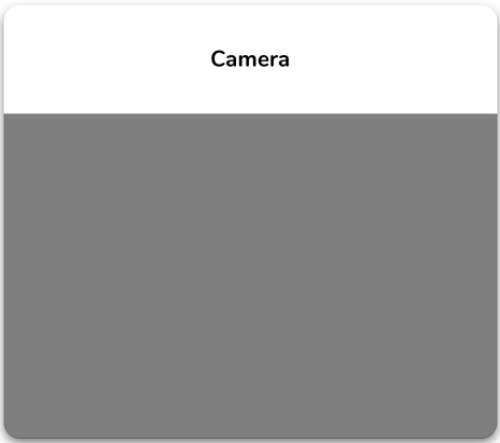

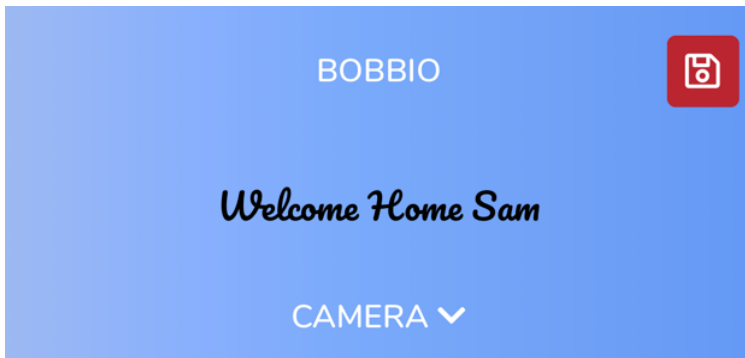


Hold text to make a nickname for the camera

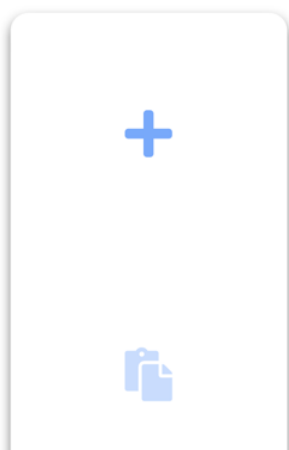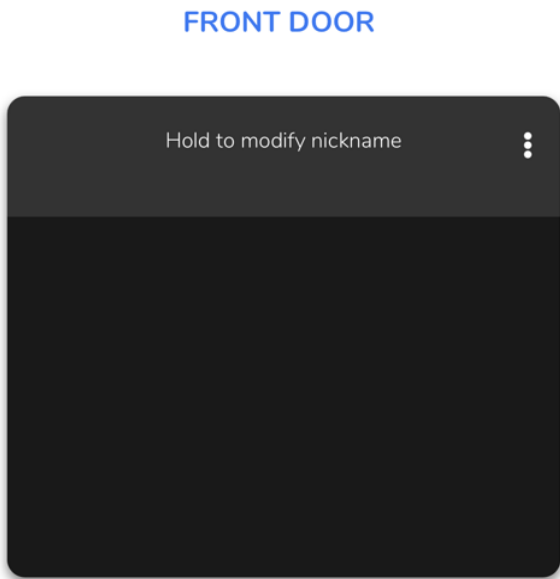

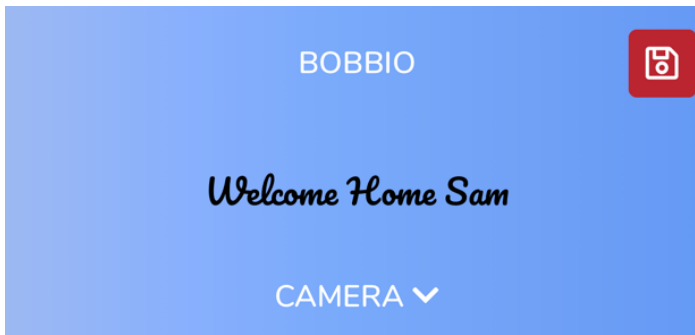

Hold down on the ONVIF discovery area to locate the cameras over ONVIF

FRONT DOOR

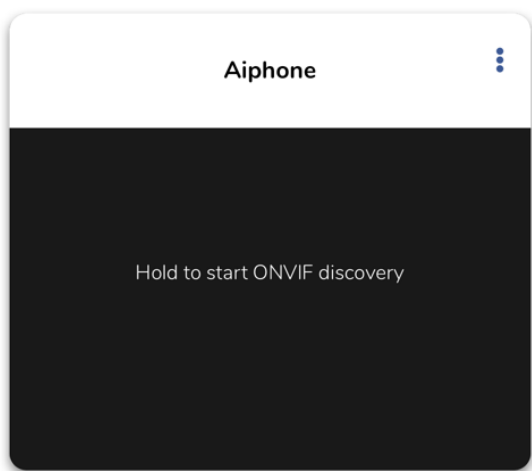


← ONVIF DISCOVERY

Select camera desired.
Click ONVIF Login
Enter username and password created in IX system


- aiphone IX-DV 192.168.1.160
- Dahua DH-IPC-HDW3641TMP-AS-0280B-AUS 192.168.1.65

[ONVIF LOGIN](#)

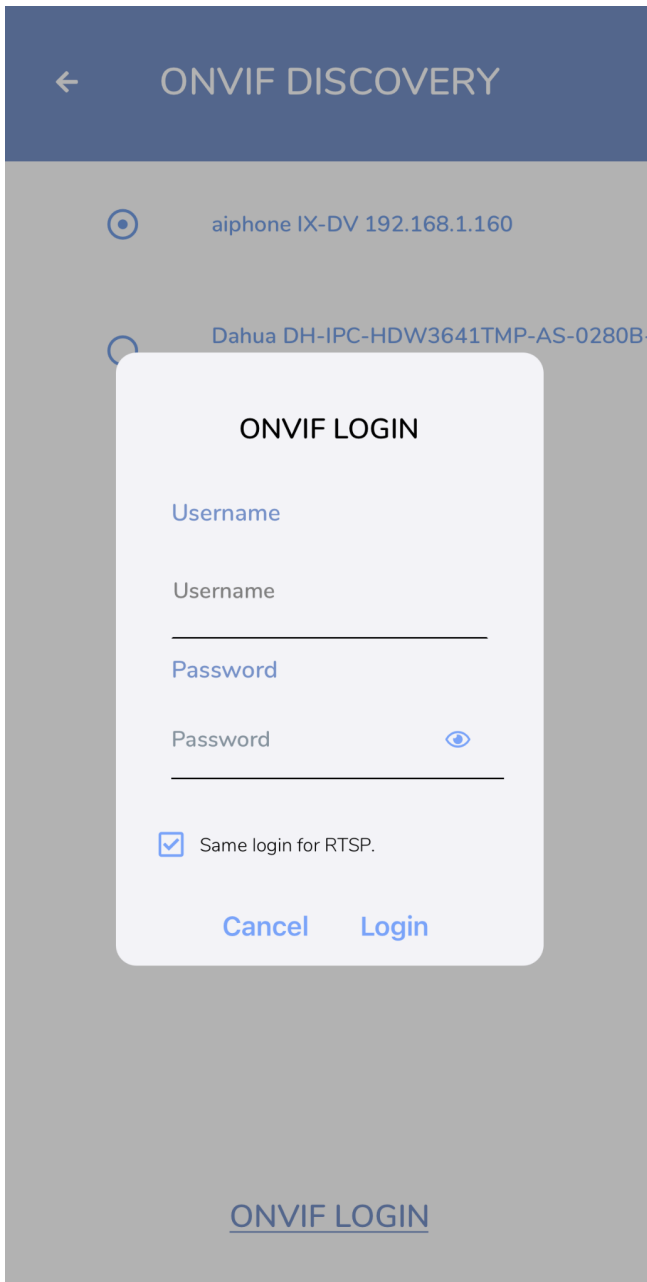


Enter the username and password you had created in the IX platform for the ONVIF protocol.


Note: it will ask if the ONVIF and RTSP credentials are the same to speed up integration.

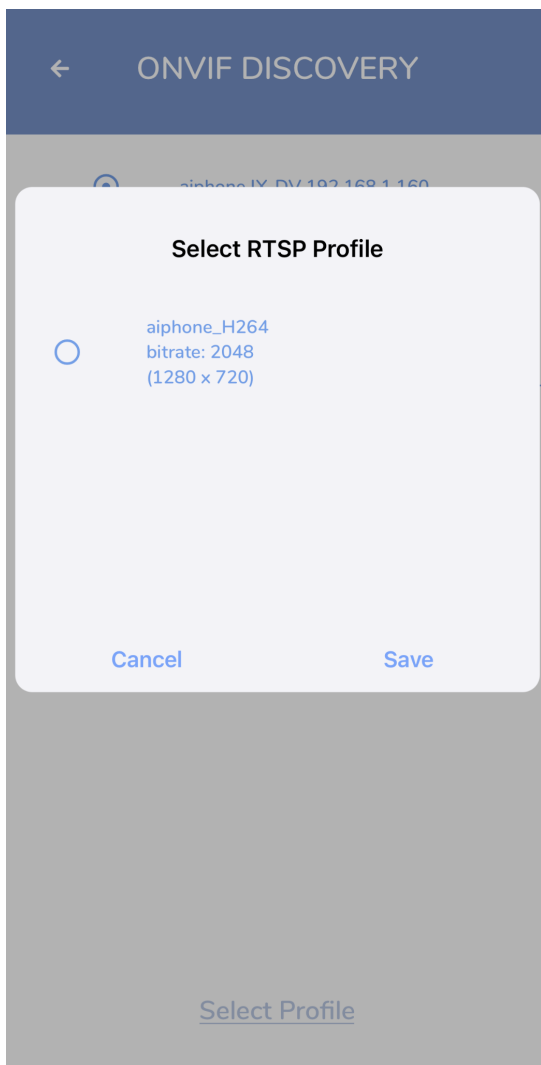

Pick RTSP profile and save

Enter in RTSP login details from the IX platform

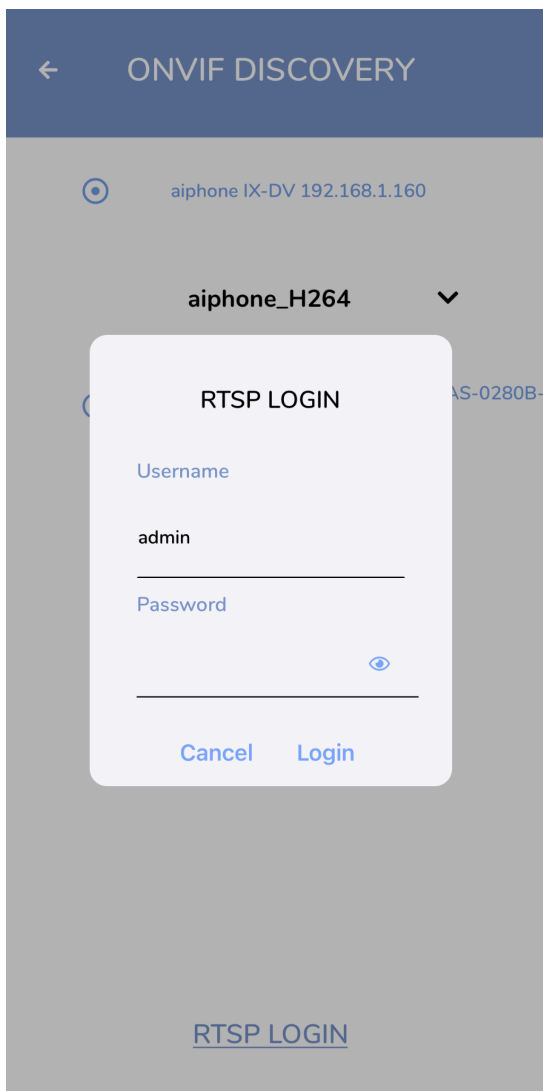

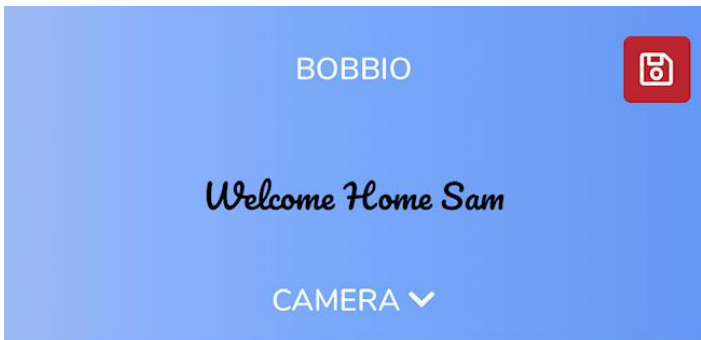

Congratulations! You have successfully set up the IX camera to BOBBIO!

Exit edit mode.

FRONT DOOR

